

AUTOTECNICA IMPORTS PTY LTD
48 NORTHGATE DRIVE
THOMASTOWN 3074
VICTORIA AUSTRALIA
WWW.AUTOTECNICA.COM.AU
TELEPHONE (03) 9464 2200
FACSIMILE (03) 9464 1400
A.C.N.004230639



EXCLUSIVE DISTRIBUTORS OF:
MONZÄ
ADVENTURER


EXCLUSIVE AUTOMOTIVE PRODUCTS

UNIVERSAL SEAT SLIDERS EXTENDER'S PART NO.641RL.

The seat slider extenders can be easily bolted to your aftermarket SPORTS or OEM seats with a 31CM distance front-to-rear bolting holes spacing. All Autotecnica seats have 31CM seat bolting spacing. However, there would be other seats with the same spacing. **NOTE SEAT SPACING.** The extenders will allow as much as 110MM of additional legroom, providing there is sufficient spacing at the rear of your vehicle seat. **OEM seats must have removable sliders to use the extenders.**

Features and Benefits:

- Welded bolts on Steel Construction
- Black Coated Finish
- Extends Legroom up to 110mm
- Raises Seat Position by only 5mm
- Suitable Driver or Passenger Side
- Easy Bolt-On Installation

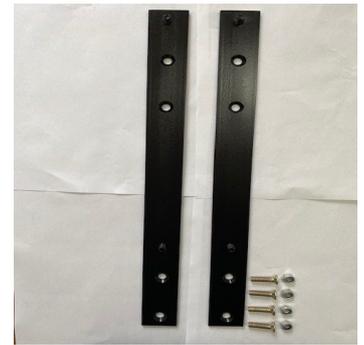

2xsliders extenders &

Hardware

PLEASE READ THE INSTRUCTION IN FULL BEFORE FITTING THE EXTENDERS TO THE SEAT.

- 1- If the seats have not been fitted to the vehicle, place the seat in an upside-down position and attach the extenders to the seat. You can select to attach the extenders to the seat depending on the leg room required by selecting the spacing of the drilled holes of the extenders." **Photos A 50mm-B 110mm". Note green dots.** Secure the extenders with the 4 x 30mm bolts supplied and ensure to use some bolts lock-tight product so that the bolts will not come loose.
- 2- Place and secure the slider onto the extenders with the supplied nylock nuts. **Photo "C"**



- 3- Once completed point 2 proceed with attaching the slider to your seat adaptors or to your vehicle floor.
Note below the seat positions.

D-Standard seating position

E-Seat positioned at 5cm rearwards.

F-Seat positioned at 11cm rearwards



"D"

Standard seating position



"E"

← 5cm



"F"

← 11cm

NOTE: THE AUTOTECNICA SEATS ARE ADR APPROVED; WE RECOMMEND HOWEVER THAT THE CONVERSION/S IS CHECKED BY AN ACCREDITED ENGINEER AFTER FITTING THE EXTENDERS TO THE VEHICLE.