

AUTOTECNICA IMPORTS PTY LTD
48 NORTHGATE DRIVE
THOMASTOWN 3074
VICTORIA AUSTRALIA
WWW.AUTOTECNICA.COM.AU
TELEPHONE (03) 9464 2200
FACSIMILE (03) 9464 1400
A.C.N. 004 230 639
ABN 24 847 451 725



EXCLUSIVE DISTRIBUTORS OF:

MONZA


ADVENTURER

EXCLUSIVE AUTOMOTIVE PRODUCTS

Part No: 638UA

UNIVERSAL SEAT ADAPTOR IS TO SUIT LEFT & RIGHT OF VEHICLES.

PLEASE READ THE INSTRUCTION BEFORE FITTING THE UNIVERSAL SEAT ADAPTOR TO YOUR VEHICLES.

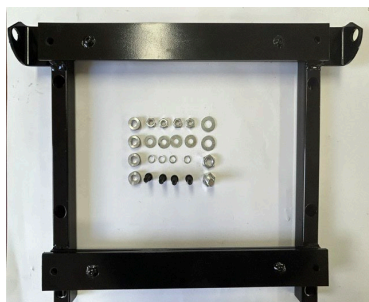

THE UNIVERSAL SEAT ADAPTOR IS DESIGNED TO BE USED IN VEHICLES WITH A FLAT FLOOR. OFFSET FLOOR LEVELS SPECIAL "L" SHAPED BRACKETS CAN BE CONSTRUCTED AND WELDED TO THE ADAPTOR. BRACKETS NOT SUPPLIED.

TWO SEAT MOUNTING BARS ARE SUPPLIED TO CONVERT THE ADAPTOR TO SUIT THE AUTOTECNICA SEATS.

THE SEAT MEASUREMENTS ARE 31CM LENGTH AND 39CM WIDTH.

ADAPTOR FLOOR ATTACHMENT SIZE. WIDTH 40CM, LENGTH 40CM

FOR THE EASIER USE OF THE SEAT MOUNTING BARS.

WE SUGGEST ATTACHING THE BARS TO THE SEAT OR THE SLIDERS FIRST AND THEN TO THE ADAPTOR FRAME WITH THE PRE-WELDED BOLTS, NUTS AND SPACES.

OUR PART NUMBER 639F SLIDER IS COMPATIBLE WITH THE MOUNTING BAR AND IT CAN BE PURCHASED SEPARATELY.

THE SEAT MOUNTING BARS ARE DRILLED TO SUIT THE AUTOTECNICA SEATS. LENGTH 31 CM AND WIDTH 39 CM. THEY CAN BE RE-DRILLED FOR DIFFERENT BOLTING PATTERN WITHIN THE SIZE OF THE MOUNTING BARS WIDTH AND LENGTH. PLEASE USE THE LENGTH AND WIDTH MOST SUITABLE FOR YOUR APPLICATION.

4X10MM, 4X5MM SPACES ARE SUPPLIED. THEY COULD BE USED TO SPACE OUT BOTH THE SEATS FROM THE BAR AND THE FRAME FROM THE FLOOR. 4X30MM M8 BOLTS/WASHES AND NUTS ALSO SUPPLIED TO ATTACH THE ADAPTOR TO THE SEAT. ALSO ENCLOSED 1XSEAT BELT BOLT/NUT/WASHES.



THE REVERSE SIDE OF THE ADAPTOR THAT BOLTS TO THE FLOOR HAS SEVERAL HOLES DRILLED. THEY CAN BE USED TO FACILITATE THE FITTING OF THE ADAPTOR TO THE FLOOR OF YOUR VEHICLE. SEE GREEN DOTS. ADAPTOR FLOOR ATTACHMENT BARS SIZE. WIDTH 40CM, LENGTH 40CM

4X10MM SPACES ARE SUPPLIED TO ELEVATE THE ADAPTOR FROM THE FLOOR. 4X5MM SPACES ARE SUPPLIED TO ELEVATE THE CONNECTING BARS FROM THE FRAME



ON THE LEFT AND RIGHT, AT THE REAR OF THE ADAPTOR "SEE GREEN DOTS" YOU WILL NOTE TWO RIGHT-ANGLE WELDED SEAT BELT BRACKETS. THESE TWO BRACKETS CAN BE USED TO ATTACH THE LAP OR SASH SEAT BELT. THIS FEATURE WOULD BE MOST SUITABLE FOR NEW VEHICLE PROJECTS TO ATTACH NORMAL OR RACE BELTS.

Note: The Autotecnica seats and the 639F(sliders) are ADR approved.

We recommend however that an accredited engineer checks the seat/s conversion of the adaptor after fitting to the vehicle